PWG 71

Extra Item Rate List

Work:- Comprehensive development of Roads and Drains in Ward no 17 Rajarajeshwari Nagara Assembly Constituency Under PACKAGE - 2019-20-RRN-DIV(03)

Item of Work	Unit	Approximate Quantity	Rate	Amount in Rs.	Whether the items are alternative to items in the tender or whether they are additional items (If items are in lieu of some items in the accepted tender, such items should be mentioned	Whether the extra item is included in the sanctioned estimate	How the extra cost of the item is proposed to be met	Whether the extra item is included in the schedule of rate of the Division. If so reference to this item of the schedule to be given, if not data sheets should accompany the rate list	Remarks
2		3	4	5	6	7	8	9	10
Supplying, laying and jointing HDPE pipes of specified grade and conforming to IS 4984-1995 with latest amendments and conveyingto work site including loading and unloading at both locationsand rolling and lowering into trenches, giving true to line andjointing of pipes and specials, giving hydraulic test as per relevantISS with all lead and lifts including encasing the pipe alround toa depth of not less than 15 cms. with soft gravel or sieved earthavailable from the excavation, testing and commissioning. The rateis exclusive of required specials and fittings wherever necessary likesaddle type, stub ends, flanged sets, bends, reducers etc. complete(Contractor will make his own arrangements for procuring waterfor testing) etc. for HDPE Grade PE100-PN6.0, 125 mm dia	Rmt	1900.00	516.03	980455.48	Additional Item	No	In the revised estimate to be sanctioned later		
Supplying, laying and jointing HDPE pipes of specified grade and conforming to IS 4984-1995 with latest amendments and conveyingto work site including loading and unloading at both locationsand rolling and lowering into trenches, giving true to line andjointing of pipes and specials, giving hydraulic test as per relevantISS with all lead and lifts including encasing the pipe alround toa depth of not less than 15 cms. with soft gravel or sieved earthavailable from the excavation, testing and commissioning. The rateis exclusive of required specials and fittings wherever necessary likesaddle type, stub ends, flanged sets, bends, reducers etc. complete(Contractor will make his own arrangements for procuring waterfor testing) etc. for HDPE Grade PE100-PN6.0, 90 mm dia	Rmt	2110.00	307.26	648323.24	Additional item	No	In the revised estimate to be sanctioned later		
Providing fusion welding Jointing for HDPE Pipes Grade PE-80 / PE-100 conforming to IS 4984-1995, of specified dia, etc. for: HDPE Grade PE80 Pipes 125 mmDIA	Rmt	1900.00	59.95	113911.84	Additional item	No	In the revised estimate to be sanctioned later		

Scanned with CamScanner

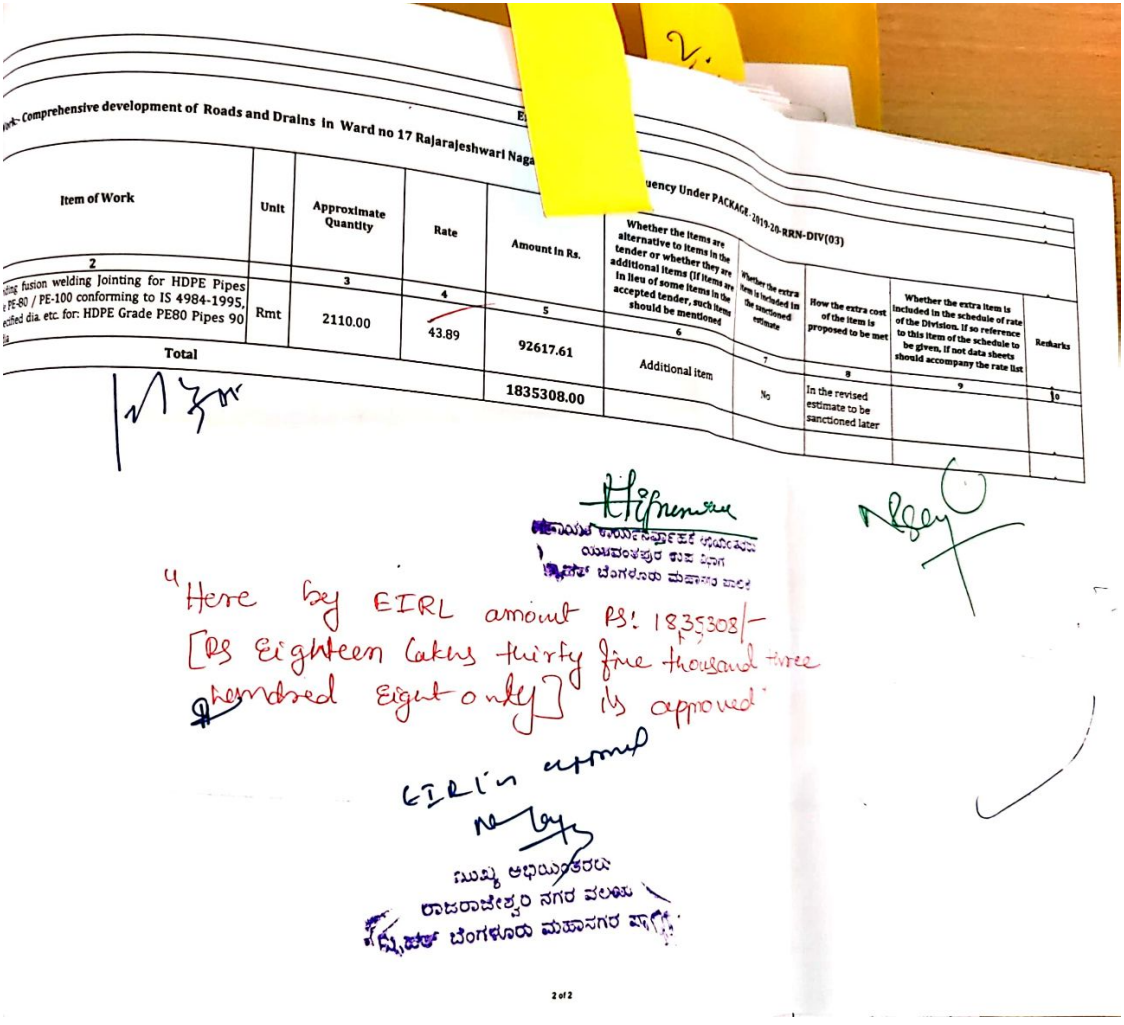

Work- Comprehensive development of Roads and Drains in Ward no 17 Rajarajeshwari Naga

Estimate

Emergency Under PACKAGE- 2019-20-RRN-DIV(03)

Item of Work	Unit	Approximate Quantity	Rate	Amount in Rs.	Whether the items are alternative to items in the tender or whether they are additional items (If items are in lieu of some items in the accepted tender, such items should be mentioned	Whether the extra item is included in the sanctioned estimate	How the extra cost of the item is proposed to be met	Whether the extra item is included in the schedule of rate of the Division. If so reference to this item of the schedule to be given, if not data sheets should accompany the rate list	Remarks
2		3	4	5	6	7	8	9	10
ding fusion welding Jointing for HDPE Pipes E PE-80 / PE-100 conforming to IS 4984-1995, ernal dia. etc. for: HDPE Grade PE80 Pipes 90 dia	Rmt	2110.00	43.89	92617.61	Additional item	No	In the revised estimate to be sanctioned later		
Total				1835308.00					

"Here by EIRL amount Rs: 1835308/-
[Rs Eighteen Lakhs thirty five thousand three hundred Eight only] is approved"

EIRL is approved

ಸಹಾಯಕ ಕಾರ್ಯನಿರ್ವಾಹಕ ಅಭಿಯಂತರರು
ಯಶವಂತಪುರ ಉಪ ವಿಭಾಗ
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ

ಸಹಾಯಕ ಕಾರ್ಯನಿರ್ವಾಹಕ ಅಭಿಯಂತರರು
ರಾಜರಾಜೇಶ್ವರಿ ನಗರ ವಲಯ
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ

2 of 2

Scanned with CamScanner